

## 2NFL AND J-BE SERIES

1/2 through 1-1/2 HP High Head Filtered Effluent Pumps

### SPECIFICATIONS

Applications	On-Site Filtered Effluent	
Capacities	50 GPM	189 LPM
Shut-off Head	480'	146.30 m
Max. Spherical Solids	1/16"	1.6 mm
Liquids Handling	filtered effluent	
Max. Liquid Temp.	122°F	68°C
Motor Electrical Data	1/2 HP, 115V, 1Ø, 1/2 to 1-1/2 HP, 230V, 1Ø, 60Hz, 3450 RPM	
Specific Gravity	.9–1.1	
Viscosity	28–35 SSU	
Discharge NPT		
8, 12, and 20 GPM:	1-1/4"	31.8 mm
25 and 35 GPM:	2"	50.8 mm
Housing	stainless steel	
Power Cord	10', 30', 50' or 100', jacketed, 14/3, SOOW	



2NFL

J-BE


(Performance charts on following page)

### FEATURES


- Cost-effective wastewater systems
- High-pressure capacity
- Corrosion-resistant design for long life
- Dependable field proven motor
- Stainless steel construction
- Built-in overload protection
- Replaceable 10', 30', 50' or 100' jacketed power cord
- Hermetically sealed windings
- Continuous-duty rating
- Frequent cycling capabilities
- Powerful, yet lightweight
- Easy handling and installation

# 2NFL AND J-BE SERIES PERFORMANCE


8 GPM – 2NFL

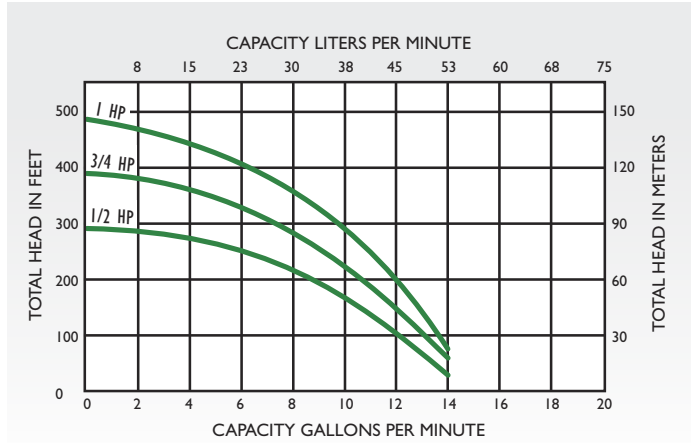


12 GPM – 2NFL

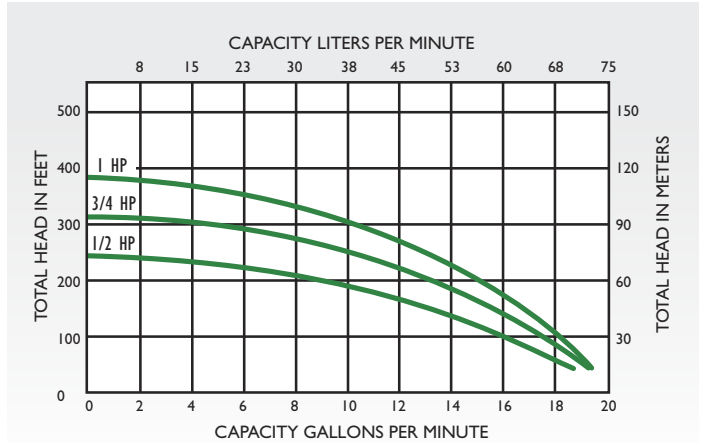

20 GPM – 2NFL

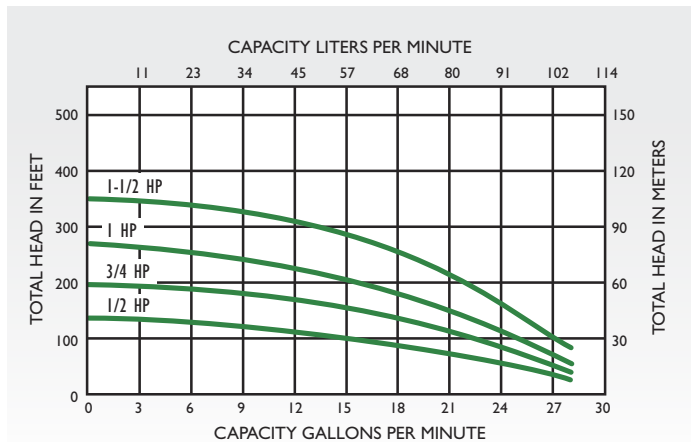

25 GPM – J-BE

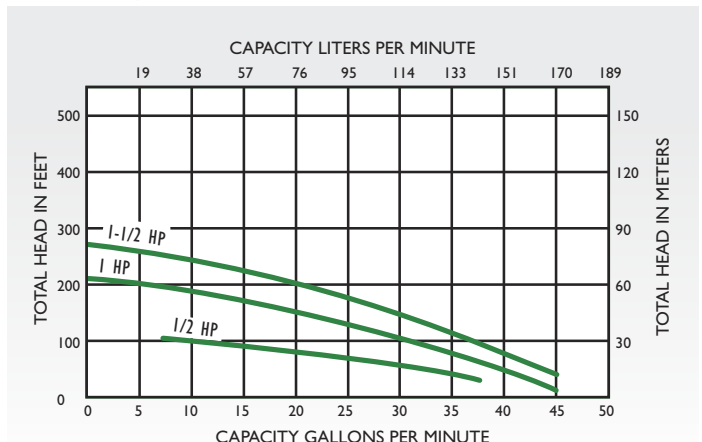

35 GPM – J-BE

